

J O S E P H H A M I L T O N & S E A T O N



FINSBURY PARK

Construction	Woven Axminster
Pile Content	80% Wool, 20% Nylon
Primary Backing	Woven Polyester/polypropylene
Width	4m
Pitch	7 per inch/27.6 per dcm
Rows	7 per inch/27.6 per dcm
Gross total pile weight (+/- 10%)	1070g/m ²
Finished total carpet weight (+/- 15%)	1900g/m ²
Pile Height	7.5mm
Total Height	10mm
Yarn count & tex	2 ply/47's R550 tex
Tog Rating	1.25

Luxury Rating	LC4
Wear Class	23/32 Heavy Domestic Use/General Commercial Use
Tuft Density per m2 (+ 10%, - 7.5%)	76,176
Appearance Classification	Class 33 Heavy Domestic/General Commercial Use
Flammability	BS EN 13501-1 Cfl-s1
Pattern Repeats	4777 TURKEY - W:33cm x L:61cm 2079 SPHEREW - 100cm x L:116cm 2577 ORBIT - W:66cm x L:66cm 2671 COTTAGE - W:100cm x L:89cm 2777 FLORAL - W:50cm x L:83cm 0878 WARM TARTAN - W:100cm x L:100cm 3077 STRIPE - W:33cm x L:33cm 8677 RED STARLIGHT - W:33cm x L:8cm 8678 BURGUNDY STARLIGHT - W:33cm x L:8cm 6678 RED TARTAN - W:33cm x L:33cm 6178 GREEN TARTAN - W:30cm x L:31cm 2179 DISCUS - W:66cm X H: 51.9cm

Guarantees: 10 years commercial

Full details of conditions and limits of guarantees available on request.



2009/533

JOSEPH HAMILTON & SEATON
RELAY PARK, RELAY DRIVE, TAMWORTH STAFFORDSHIRE, B77 5PR

TELEPHONE: (01827) 831400 TELEFAX: (01827) 831401
EMAIL: sales@jhscarpet.com

Registered Office: Gorsey Lane Coleshill Birmingham B46 1JU England HFD Ltd Registered in England and Wales No. 2674152

J O S E P H
H A M I L T O N
& S E A T O N



Carpet Tolerances

The UK pattern repeat tolerance is 1.25% or 5 cm over a length of 4 meters.


EU tolerance is:

When measuring the actual pattern repeat the length at the seam a) – b) falls between the following values.

Pattern repeat along the length between 0 cm and 10 cm - maximum variation is 2.0% of the pattern repeat.

Pattern repeat along the length between 10cm and 100 cm - maximum variation 1.0% of the pattern repeat.

Pattern repeat along the length over 100 cm - maximum variation is 1.25% of the pattern repeat

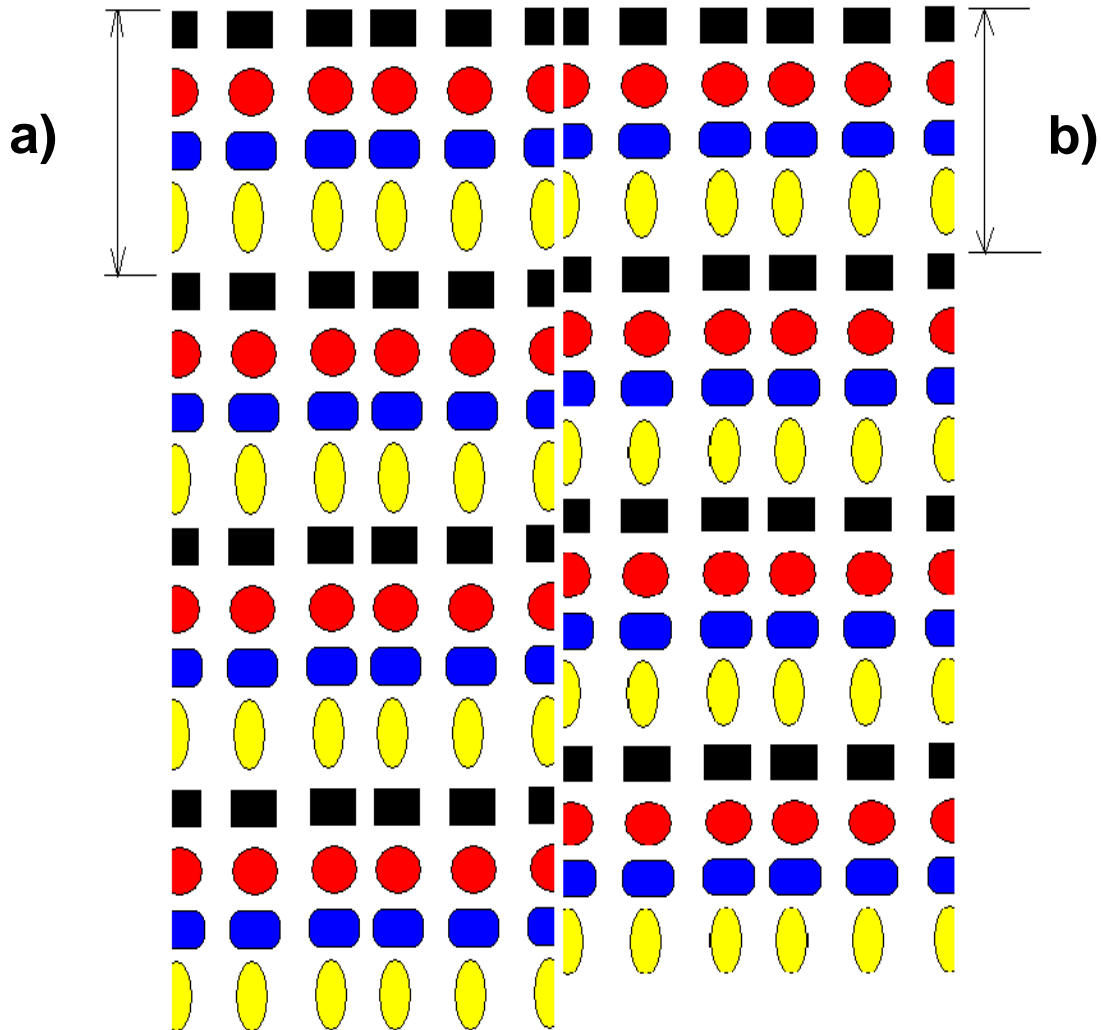

2009/533

JOSEPH HAMILTON & SEATON
RELAY PARK, RELAY DRIVE, TAMWORTH STAFFORDSHIRE, B77 5PR

TELEPHONE: (01827) 831400 TELEFAX: (01827) 831401
EMAIL: sales@jhscarpets.com

Registered Office: Gorsey Lane Coleshill Birmingham B46 1JU England HFD Ltd Registered in England and Wales No. 2674152

J O S E P H
H A M I L T O N
& S E A T O N



The European tolerance, not yet adopted by the UK is 4 cm over the 4 m width (1%). (UK tolerance is 1.25%)


Tolerance for bowing and skew is: + 1% -1% with a maximum of 1cm / m across the roll width.

Less than 100cm wide maximum 10 mm.

Greater than 100 cm and less than 200 cm maximum 20 mm.

Greater than 200cm and less than 300 cm maximum 30 mm.

The following sketch shows bowing tolerance across the width.

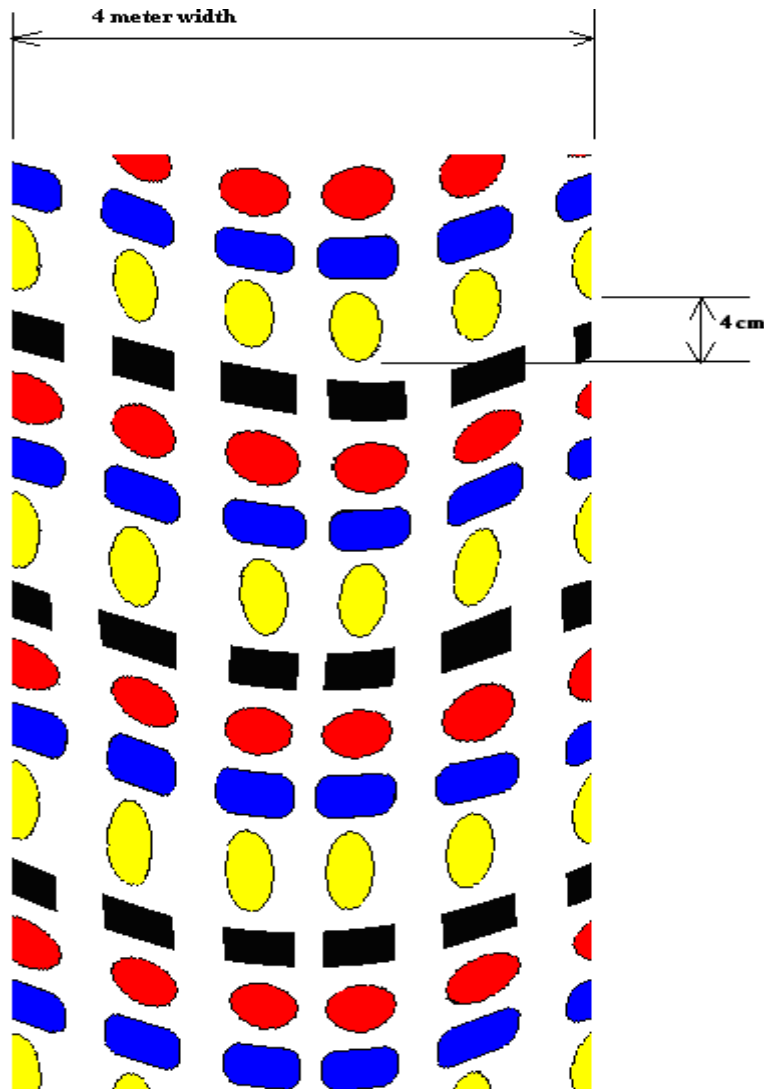

2009/533

JOSEPH HAMILTON & SEATON
RELAY PARK, RELAY DRIVE, TAMWORTH STAFFORDSHIRE, B77 5PR


TELEPHONE: (01827) 831400 TELEFAX: (01827) 831401
EMAIL: sales@jhscarpets.com

Registered Office: Gorsey Lane Coleshill Birmingham B46 1JU England HFD Ltd Registered in England and Wales No. 2674152

J O S E P H
H A M I L T O N
& S E A T O N



The following sketch shows skew tolerance across the width.

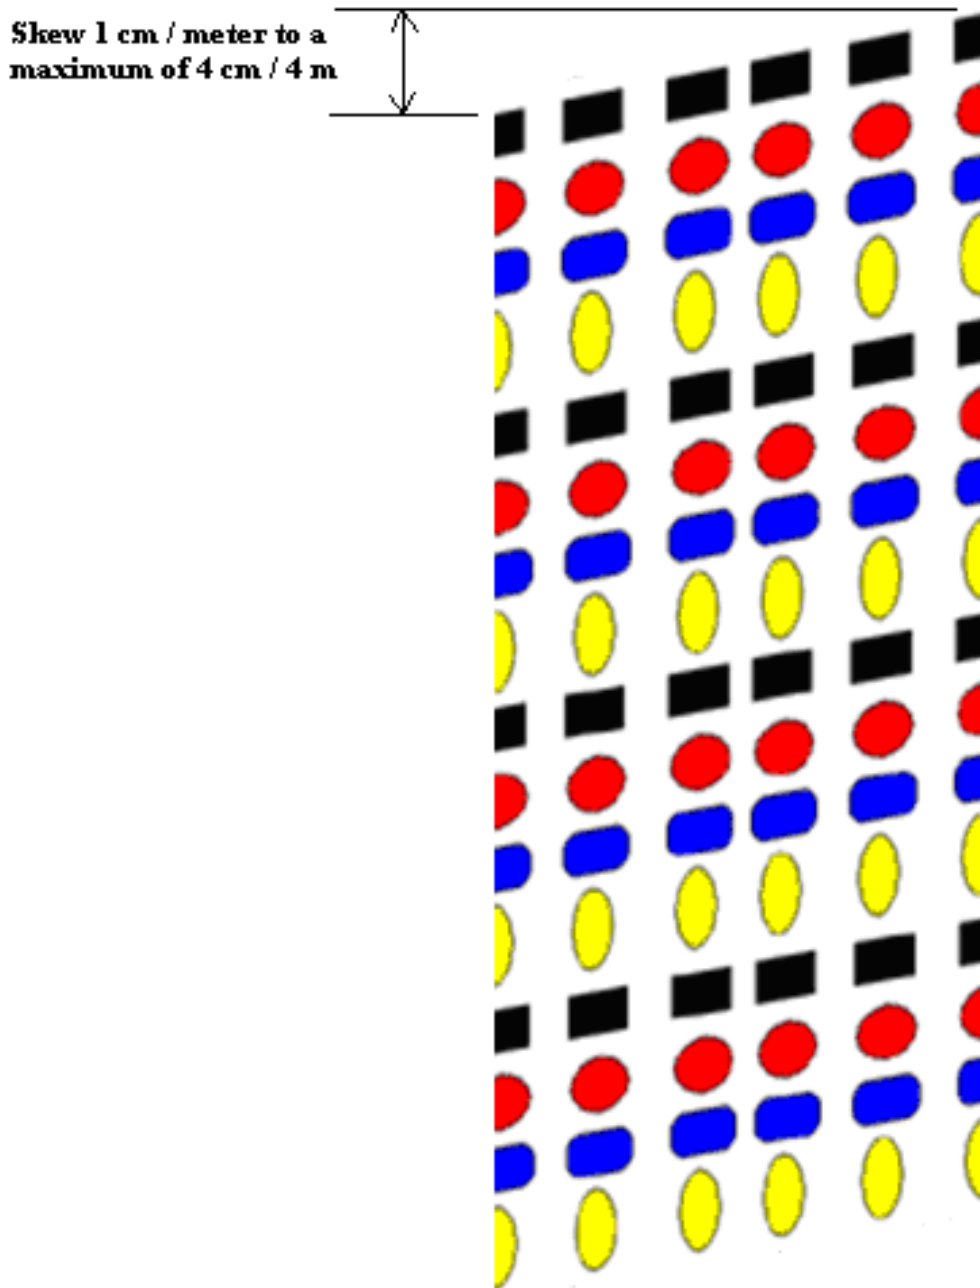

2009/533

JOSEPH HAMILTON & SEATON
RELAY PARK, RELAY DRIVE, TAMWORTH STAFFORDSHIRE, B77 5PR

TELEPHONE: (01827) 831400 TELEFAX: (01827) 831401
EMAIL: sales@jhscarpets.com

Registered Office: Gorsey Lane Coleshill Birmingham B46 1JU England HFD Ltd Registered in England and Wales No. 2674152

J O S E P H
H A M I L T O N
& S E A T O N



Understanding Carpet Manufacturer Tolerances

A successful patterned carpet installation requires a thorough understanding of patterned carpet characteristics by designers, specifiers, and all others involved with carpet selection and installation.

Carpet is a textile fabric subject to inevitable process variations, which are more critical when patterns are involved. JHS provide established tolerances and specific installation instructions for their patterned goods and although JHS Carpets do not guarantee exact pattern match, skilled, responsible and competent craftsmen, who are experienced in the installation of patterned carpet, can effectively make adjustments within manufacturing tolerances to provide a successful installation. To assist this process, manufacturing tolerances must be clearly understood, communicated and agreed upon by all parties prior to the specification, quote, purchase and installation. There must always be an understanding about the additional carpet that must be allowed for pattern match.

Factors affecting an acceptable pattern match on the job site include, but are not limited to: the method of installation, the condition and levelness of the floor and the type of carpet backing materials used. It is imperative that all parties agree upon realistic levels of expectation before the carpet is installed. Installation of patterned carpet requires more time and expertise, nearly always requiring the use of power stretchers and additional staffing, thus affecting the cost of installation.

Important: - before installing, you should verify the product received is the product that was ordered and check for any visible defects.

To ensure a successful installation the carpet installer must perform certain measurements on each uninstalled section of carpet, making multiple checks along the length, and consider the average. With most pattern carpets, these variations are not visually apparent. However, in certain geometric patterns the variation may appear to be more than actually present, which is especially true in very large installations. All carpet should be dry-laid prior to installation to evaluate the visual effect and acclimatized to the site conditions for at least 12 to 24 hours.

Power stretchers and stay nailing are commonly required to achieve a correct installation and sufficient time should be allocated to effectively make adjustments during the installation process. If the floor will not allow for stay nailing the seaming must be carried out on top of a board where the necessary stay tacking can be carried out in the case of a stretch installation.

JHS will ensure their carpets meet the tolerances stated but when the carpet meets the tolerances stated it is the responsibility of the fitters to install the carpet to the correct (or to an agreed acceptable) standard.



2009/533

JOSEPH HAMILTON & SEATON
RELAY PARK, RELAY DRIVE, TAMWORTH STAFFORDSHIRE, B77 5PR

TELEPHONE: (01827) 831400 TELEFAX: (01827) 831401
EMAIL: sales@jhscarpets.com

Registered Office: Gorsey Lane Coleshill Birmingham B46 1JU England HFD Ltd Registered in England and Wales No. 2674152